
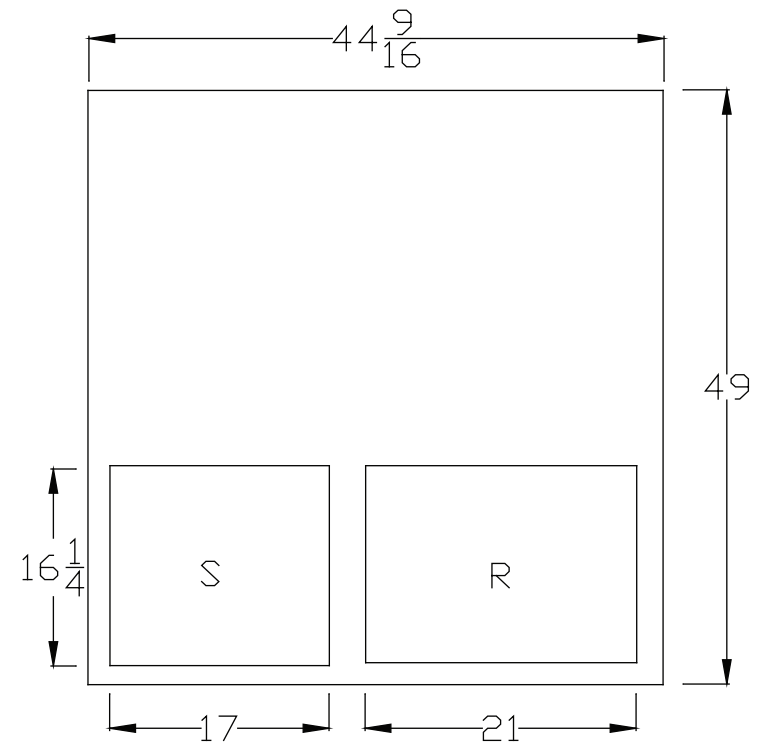
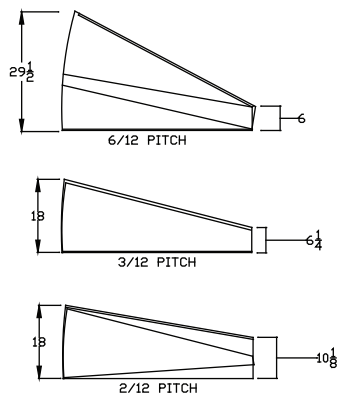


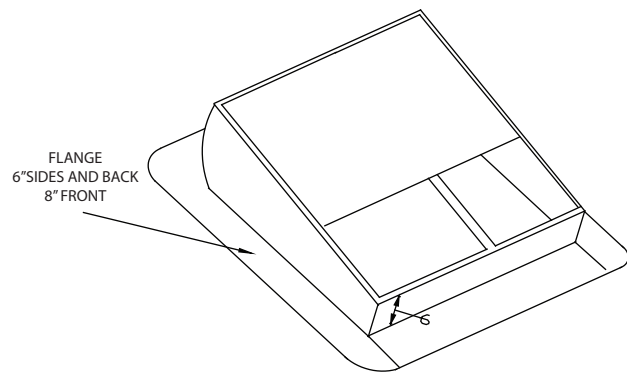

- Fully assembled for fast installation
- Adjustable from a 2/12 up to a 6/12 pitch
- 18 Gauge prime galvanized steel
- 1" fiberglass insulation for sound attenuation
- Fully Welded
- Curb installer to seal all corners and joints of curb as necessary
- Supplied with gasket material

RECOMMENDED PLENUM SIZES

SUPPLY - ACPIDXR36 GZ PLENUM-26 GAUGE-KD - 3/4" FLANGE

16 5/8" x 15 7/8" 36" HI-BARE

SUPPLY - ACPIDXR36 IZ PLENUM-26 GAUGE-KD - 3/4" FLANGE

16 5/8" x 15 7/8" 36" HI-1" LNR

RETURN- ACPIFDDR36 GZ PLENUM-26 GAUGE-KD - 3/4" FLANGE

20 5/8" x 15 7/8" 36" HI-BARE

RETURN - ACPIFDDR36 IZ PLENUM-26 GAUGE-KD - 3/4" FLANGE

20 5/8" x 15 7/8" 36" HI-1" LNR



MODULAR METAL FABRICATORS, INC.

RRNL/RRPL/RRL
GAS ELECTRIC
2 TO 5 TON

SIZE	FSCM NO.	PART NO.	REV
SCALE		SHEET	